



Speedfit®

Brass Manifolds

The Manifolds are available in 2, 3 or 4 outlet models, with push-fit for a quick and easy installation. Colour coded control knobs allow for parts of the system be isolated for service or replacement.




The 3/4" M x F inlets and outlets can be connected together to make a theoretically endless distribution system, providing there is enough water pressure. They are joined by means of a patented design which allows the installer to tighten 2 manifolds together and align them before making the final seal with the backnut and 'O' ring.

The Manifolds are ideal for installations such as bathrooms in blocks of flats or multi outlet installations such as basins, toilets or showers in commercial applications.

The control knobs have the means to be labelled 'Basin', 'Bath', 'Sink', 'Shower', 'Toilet', 'Bidet' or 'Washing Machine'.



Dimension

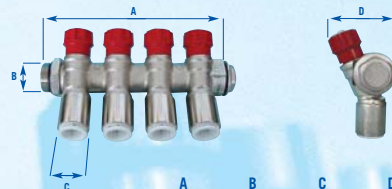

	A	B	C	D
2 PORT	125	26	26	52
3 PORT	160	26	26	52
4 PORT	240	26	26	52

All dimensions in mm.

Working Pressures and Temperatures

Maximum Pressure	10 Bar - 20°C
Maximum Temperature	95°C - 3 Bar

Size Range

RED HANDLE

JGMAN2-R	2 PORT	3/4" x 15
JGMAN3-R	3 PORT	3/4" x 15
JGMAN4-R	4 PORT	3/4" x 15

BLUE HANDLE

JGMAN2-B	2 PORT	3/4" x 15
JGMAN3-B	3 PORT	3/4" x 15
JGMAN4-B	4 PORT	3/4" x 15

A blanking plug is supplied with each manifold.



- *Push-fit connection for an easy installation*
- *Independent control of each outlet*
- *Compact space saving design*
- *Can be joined using backnut and 'O' ring connection*
- *Manufactured in DZR brass*



NEW

Brass Manifolds

Other Speedfit Products

EQUAL STRAIGHT CONNECTOR	Size 15mm 20mm 25mm 32mm	STOP END	Size 15mm 20mm 25mm 32mm	BRASS CHROME PLATED SERVICE VALVE	Size 15mm 20mm 25mm 32mm
PLCOPPER COUPLER	Size 20mm x 15mm 25mm x 15mm 25mm x 25mm	4 WAY MANIFOLD	Size 15mm 20mm 25mm 32mm	BRASS CHROME PLATED SERVICE VALVE WITH TAP CONNECTOR	Size 15mm x 1/2" 20mm x 1/2"
EQUAL ELBOW	Size 15mm 20mm 25mm 32mm	4 PORT BALL MANIFOLD	Size 15mm 20mm x 15mm 25mm x 15mm	BRASS CHROME PLATED BALL VALVE	Size 15mm 20mm 25mm 32mm
STEM ELBOW	Size 15mm x 15mm 15mm x 20mm 20mm x 25mm	BRASS BALL MANIFOLD	4 PORT 20mm x 15mm 25mm x 15mm 12 20mm	BRASS DRAIN COCK	Size 15mm 20mm
EQUAL TEE	Size 15mm 20mm 25mm 32mm	TANK CONNECTOR	Size 15mm 20mm 25mm	FLEXI HOSES	Size 15 x 15 22 x 15 15 x 12 12 x 15 22 x 15
REDUCING TEE	Size 15 x 15 x 15mm 15 x 15 x 20mm 22 x 15 x 15mm 22 x 15 x 20mm 22 x 20 x 15mm 22 x 20 x 20mm 28 x 20 x 20mm 28 x 25 x 20mm	BRASS WALL COUPLER	Size 15mm x 1/2" BSP 20mm x 1/2" BSP 25mm x 1/2" BSP 32mm x 1/2" BSP	COLD FIRMING BEND	Size 15mm 20mm 25mm
REDUCING TEE	Size 22 x 20 x 15mm 22 x 20 x 20mm 22 x 25 x 15mm 22 x 25 x 20mm 28 x 20 x 15mm 28 x 20 x 20mm	BRASS WING BACK ELBOW	Size 15mm x 1/2" BSP 20mm x 1/2" BSP	PEX BARBED PIPE	Size 10mm x 1.2m 15mm x 1.2m 20mm x 1.2m 25mm x 1.2m 32mm x 1.2m 32mm x 2.0m
FEMALE COUPLER - TAP CONNECTOR	Size 15mm x 1/2" BSP 20mm x 1/2" BSP 25mm x 1/2" BSP	BRASS MALE STEM ADAPTOR	Size 15mm x 1/2" BSP 20mm x 1/2" BSP 25mm x 1/2" BSP	PEX BARBER PIPE	Size 10mm x 1.2m 15mm x 1.2m 20mm x 1.2m 25mm x 1.2m 32mm x 1.2m 32mm x 2.0m
STRAIGHT TAP CONNECTOR	Size 15mm x 1/2" BSP 20mm x 1/2" BSP 25mm x 1/2" BSP	BRASS FEMALE STEM ADAPTOR	Size 15mm x 1/2" BSP 20mm x 1/2" BSP 25mm x 1/2" BSP	POLYBUTYLENE BARBER PIPE	Size 10mm x 1.2m 15mm x 1.2m 20mm x 1.2m 25mm x 1.2m 32mm x 1.2m 32mm x 2.0m
BENT TAP CONNECTOR	Size 15mm x 1/2" BSP 20mm x 1/2" BSP	STOP VALVE	Size 15mm 20mm Maximum 6°C	SUPERSEAL PIPE INSERT	Size 15mm 20mm 25mm 32mm
REDUCING STRAIGHT COUPLER	Size 15mm x 15mm 20mm x 15mm 25mm x 15mm	BRASS STOP TAP	Size 15mm 20mm Maximum 6°C	PIPE CLIPS AND SPACERS	Size 15mm 20mm 25mm 32mm
REDUCER	Size 15 x 15 20 x 15 25 x 15 28 x 20	WASHING MACHINE TAP	Size 15mm x 3/4" BSP Maximum 6°C	PIPE CUTTER	For up to 25mm non-psi pipe
PLUG	Size 15mm 20mm 25mm 32mm	EMERGENCY SHUT OFF TAP	Size 15mm Maximum 6°C	UNDERLOOR HEATING	Designed to be quick and easy to install
		DOUBLE CHECK VALVE	Size 15mm Maximum 6°C		
		PLASTIC SERVICE VALVE	Size 15mm Maximum 6°C		

John Guest Speedfit Limited.

Hornton Road, West Drayton,
Middlesex UB8 3JL, England.
Tel: 01895 449233 Fax: 01895 420321.
www.speedfit.co.uk

Technical Help Desk: 01895 425333

The company has a policy of continuous research and development and reserves the right to amend without notice the specification and design of all products illustrated in this catalogue. John Guest Speedfit reserve the right to change the colour and shape of products. Photographs are for illustration purposes only.

Subject to our Terms and Conditions of Sale available on request.

John Guest and Speedfit are registered trademarks of John Guest International Limited © Copyright 2005.

JG Speedfit®

For an even distribution throughout an installation.



WRAS
APPROVED
PRODUCT